
HONDA

Committed to give you more power



***Photo may vary from actual product.

Reliable Partner. Proven Technology.

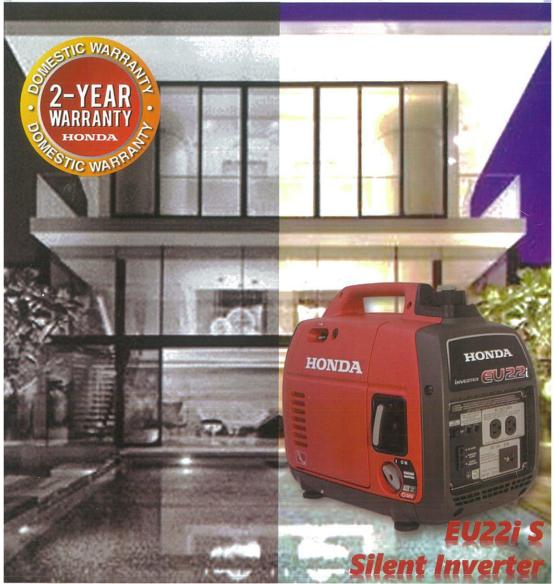



SPECIFICATIONS


MODEL	EU22i
Maximum AC Output, W	2200
Rated AC Output, W	1800
AC Output Voltage, V	220
AC Frequency, Hz	60
Fuel Tank Capacity, L	3.6 L
Max. Continuous Operating Time at Rated Power, h	3.2
Max. Continuous Operating Time at ¼ Rated Power, h	8.1
Operating Noise Level, dB	65.1
Dimension	509 x 290 x 425 mm
Dry weight	21.1




Vent lever Choke lever Recoil grip Engine switch

SPECIAL FEATURES

INCREASED GENERATING POWER



ENHANCED WORKING PERFORMANCE



QUIETNESS. By increasing the rational speed, engine noise is reduced while power generation output increased as compared with current model.

Authorized Dealer:

**SRP:

MANUEVERABILITY. Recoil rope guard is added to prevent the damage on the side cover during recoil operation.



EASE OF MAINTENANCE. By changing the shape and enlarging the oil drain guide, the oil inlet is improved to allow oil filling directly from an oil bottle. (Not applicable to all bottles)

· Filling the oil



Draining the oil



Honda Philippines Inc.

Lot 34, Phase 1-B, Road 3, First Philippine Industrial Park, Tanauan City, Batangas

Tanauan City, Batangas
Sales Hotline: Customer Service

(02) 756-7300 Hotline:

(02) 581-700 loc. 7078 1-800-10-HONDAPH

1-800-10-4663274